

ALVERA

BEYOND THE ORDINARY



STONE POLYMER COMPOSITE FLOORING BY : **Alderon**



WHY CHOOSE ALVERA

- Various designs to choose from.
- Realistic look and feel.
- Lightweight yet resilient.
- Good durability for its cost.
- Easy to install and clean.
- Water resistant.
- Abrasion resistant.
- Floorscore certified.
- A more environmentally friendly flooring option.

PRODUK		4/0.5 mm		4/0.3 mm	
Klasifikasi		ASTM F1700	Kelas III / Tipe B	ASTM F1700	Kelas III / Tipe B
Aplikasi		EN ISO 10874	23/33	EN ISO 10874	23/31
Instalasi		-	Sistem klik / Floating	-	Sistem klik / Floating
Garansi		Light Commercial	7 Tahun	Light Commercial	5 Tahun

SPESIFIKASI		4/0.5 mm		4/0.3 mm	
Tebal SPC		ISO 24346	4 mm		4 mm
Tebal Wear Layer		ISO 24340	0.5 mm		0.3 mm
Ukuran SPC (Tipe Wood)		ISO 24341	Panjang : 1220 mm Lebar : 180 mm		Panjang : 1220 mm Lebar : 180 mm
Ukuran SPC (Tipe Stone)		ISO 24341	Panjang : 610 mm Lebar : 305 mm		Panjang : 610 mm Lebar : 305 mm
Berat SPC		EN 430	8.25 kg/m ²		8.25 kg/m ²
Straightness/Squareness		ISO 24342	≤ 0,25 mm		≤ 0,25 mm
Edge profile		-	Standard dengan sistem klik		Standard dengan sistem klik

PROPERTIES PRODUK		4/0.5 mm		4/0.3 mm	
Ketahanan Terhadap Abrasi		EN 660 : part-1	Grup T : ≤0,08 mm		
Indentasi Sisa		ISO 24343-1	≤0.10 mm		
Ketahanan Terhadap Kimia		EN 438	Grade 5		
Ketahanan Terhadap Api		EN 13501 /-ISO 9239-1	Kelas Bfl-s1(B1)		
Stabilitas Dimensi		ISO 23999	≤0,12%		
Color Fastness		ISO 105-B02:1994	≥Grade 6		
Ketahanan Terhadap Air		EN 317	0% Swelling		
Slip Resistance		AS 4586 / DIN 51130	R10		
Emisi Formaldehida		EN 717-1	E1		
Kandungan Phtalate		CPSC-CH-C1001-09.3	Tidak terdeteksi (Bebas phtalate)		
Curving		ISO 23999	≤1,2mm		
Peel Resistance		ISO 24345	≥50N/5cm		
Locking strength		ISO 24344	≥120N/5cm		


Castor Chair

ISO 4918

Tipe W : Setelah 25.000 siklus, tidak ada delaminasi yang terjadi. Tidak ada kerusakan pada permukaan selain sedikit perubahan tampilan

KEMASAN		4/0.5 mm		4/0.3 mm	
Jumlah per box		Tipe Stone Tipe Wood	14 Pcs 12 Pcs	Tipe Stone Tipe Wood	14 Pcs 12 Pcs
Area per box		Tipe Stone Tipe Wood	2.60 m ² 2.63 m ²	Tipe Stone Tipe Wood	2.60 m ² 2.63 m ²

METODE INSTALASI



Brick



Ashlar



Stagger



Slip
Resistant



Fire
Resistant



Ecological



Abrasion
Resistant



Chemical
Resistant



Silent



Impact
Resistant



Click
System



Contact

Alvera.Flooring

@alvera.flooring

www.alvera.co.id

Distributed by:



ALVERA

BEYOND THE ORDINARY

STONE POLYMER COMPOSITE FLOORING



MISTI PEACH

SP 1-01 (4/0.5mm)
SP 3-01 (4/0.3mm)



VICTORIA BROWN

SP 1-02 (4/0.5mm)
SP 3-02 (4/0.3mm)



SABINIO BROWN

SP 1-03 (4/0.5mm)
SP 3-03 (4/0.3mm)



ALVERA

BEYOND THE ORDINARY

STONE POLYMER COMPOSITE FLOORING



LOGAN WHITE


SP 1-04 (4/0.5mm)
SP 3-04 (4/0.3mm)



ROCKY GREY

SP 2-01 (4/0.5mm)

ALVERA 
Type 4 /0.5mm
Type 4 /0.3mm

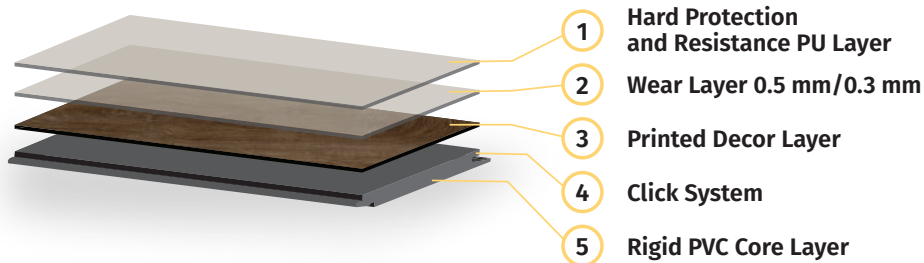

Dimension

Stone Series

305 x 610 x 4 mm

Dimension

Wood Series

180 x 1220 x 4 mm